


HPA17A

Features

- ▶ Compact and Light Weight
- ▶ Low Power Consumption
- ▶ PCB Mountable
- ▶ Wave Solderable


Dimension

Unit : mm
Tolerance : ± 0.3mm

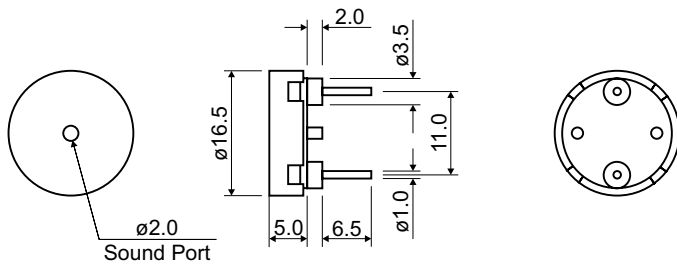

Frequency Response

Applied Signal : 5V_{p-p}, 50% Duty Square Wave
Measuring Distance : 10cm

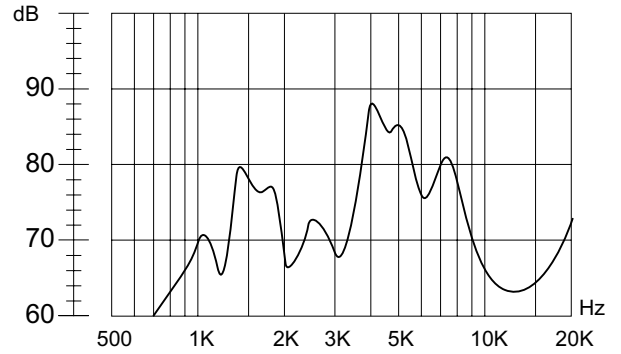

Specification (all data taken at 25°C unless otherwise specified)

Model	HPA17A
Rated Voltage (V _{p-p})	5
Operating Voltage (V _{p-p})	1 ~ 30
★ Rated Current (mA)	≤ 3
Capacitance 120Hz (nF)	12 ± 30%
★ Sound Output at 10cm (dB)	≥ 78
Rated Frequency (Hz)	4096 ± 500
Operating Temperature (°C)	-20 ~ +60
Storage Temperature (°C)	-30 ~ +70
Weight (g)	1

★ Value Applying Rated Voltage, Rated Frequency, 50% Duty Square Wave